




Worldwide Oilfield
Machine ME

SWT Equipments

10K Chokemanifold

The Manifold is a skid mounted unit comprising Spaces:

- 1 inlet Tea
- 2 Upstream Manual Valves (Model 200M)
- 1 Manual Adjustable Choke Valve
- 1 Positive Choke
- 1 Downstream Manual Valves (Model 200M)
- 1 Skid
- 1 Tool Box
- The Necessary Stud Bolts, Nuts and Ring Gaskets
- 1 Set of TC Lined Choke Beans in 1/8" increment from 1/8" thru 2" = 16 Nos
- 1 Bean Wrench for 1" Max Bean
- 1 Bean Wrench for 2" Max Bean
- 1 Bean Adaptor 2" X 1"
- 6 Needle Valve - Thermowell pocket
- 3" Fig 1502 Female Test Plug
- 3" Fig 1502 Male Test Plug

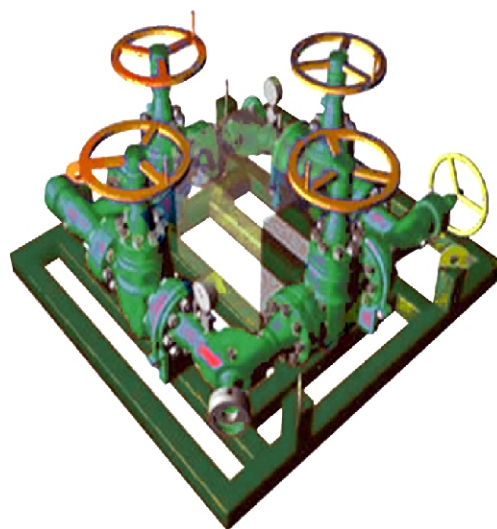

Nominal Size	3-1/16"
Max Bean Size	2"
End Connections	3" Fig 1502 Female Inlet 3" Fig 1502 Male Inlet
Working Pressure	10000 Psi
Test Pressure	15000 Psi
Material Class	DD - Sour service - NACE MR 01-75
Temperature Class	P + U (-20°F to +250°F) (-29°C to +121°C)
PSL	3
Design Specifics	316 SS Inlay in Flanges RTJ's and Bonnet Seal Areas
Construction Code	API 6A Latest edition - NACE MR-01-75 - DNV Lifting Appliance
Certification	Manufacturing in Conformity to API 6A-PSL 3 Certification by 3rd party if required
Documentation	Quality File Maintenance Manual for Valves Maintenance Manual for Adjustable Choke Maintenance Manual for Positive Choke
Optional Equipment (to be added to order if needed)	Pressure Gauge 0-10000 Psi

PHONES : +92-51-4433148, 4433415
EMAIL : info@eastern-testing.com
VISIT US : www.eastern-testing.com

